WHERE TO PLACE CARTS

-IN SIDEWALK OR DRIVEWAY APRON WITH A MINIMUM OF 3 FT. SIDEWALK CLEARANCE FOR PASSAGE
-IN GUTTER NEXT TO DRIVEWAY WHERE THERE IS NO TRAVEL LANE
(RECOMMENDED IN HEAVY PARKING AREAS)
-BEHIND SIDEWALK NO MORE THAN 8 FT. FROM CURB IN NO PARKING ZONES
-NO OBSTRUCTIONS BETWEEN CART AND CURB
-MUST NOT BE PLACED ON TOP OF SNOW PILES
-4 FT. MINIMUM CLEARANCE FROM ALL OBSTACLES INCLUDING OTHER CARTS

NOTE: MAXIMUM TRUCK ARM REACH IS 8 FT.

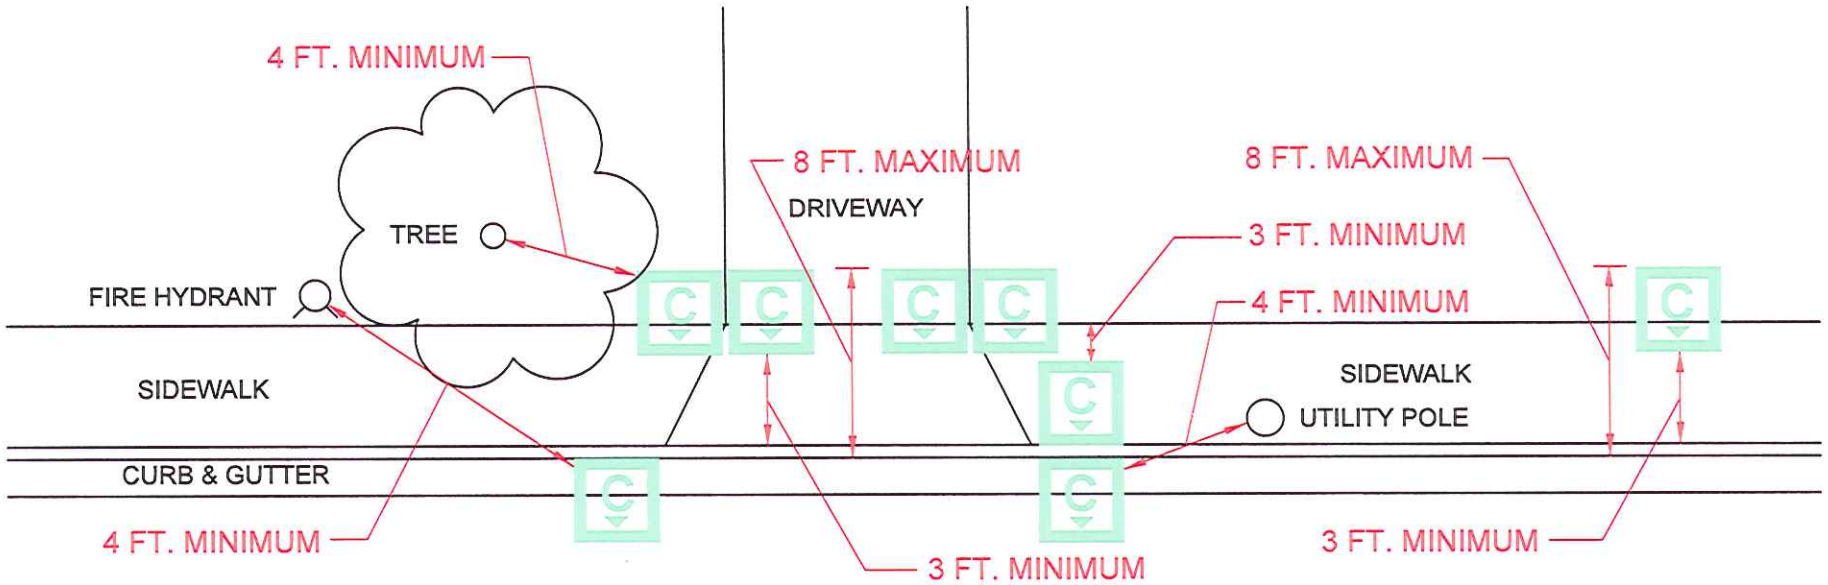

SIDEWALK AT CURB

J:\SOS\VSC\Cart_Locations.dwg

WHERE TO PLACE CARTS

-IN DRIVEWAY APRON
-ANYWHERE IN TERRACE
-IN GUTTER NEXT TO DRIVEWAY WHERE THERE IS NO TRAVEL LANE
(RECOMMENDED IN HEAVY PARKING AREAS)
-NO OBSTRUCTIONS BETWEEN CART AND CURB
-MUST NOT BE PLACED ON TOP OF SNOW PILES
-4 FT. MINIMUM CLEARANCE FROM ALL OBSTACLES INCLUDING OTHER CARTS

NOTE: MAXIMUM TRUCK ARM REACH IS 8 FT.

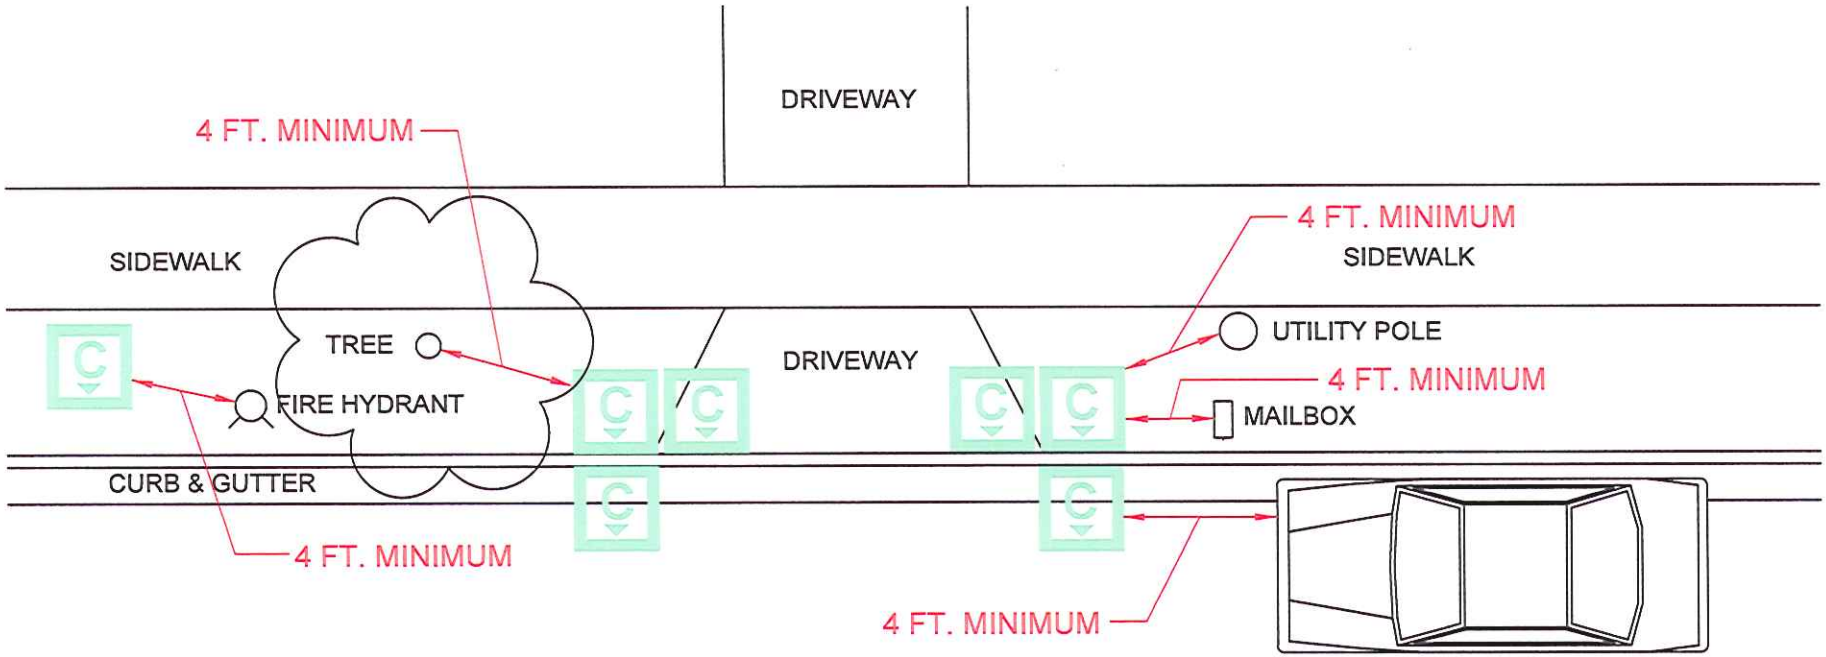

SIDEWALK AND CURB

:\SOS\VISC\Cart_Locations.dwg

WHERE TO PLACE CARTS

-IN DRIVEWAY APRON
-ANYWHERE ALONG BACK OF CURB
-IN GUTTER NEXT TO DRIVEWAY WHERE THERE IS NO TRAVEL LANE
(RECOMMENDED IN HEAVY PARKING AREAS)
-NO OBSTRUCTIONS BETWEEN CART AND CURB
-MUST NOT BE PLACED ON TOP OF SNOW PILES
-4 FT. MINIMUM CLEARANCE FROM ALL OBSTACLES INCLUDING OTHER CARTS

NOTE: MAXIMUM TRUCK ARM REACH IS 8 FT.

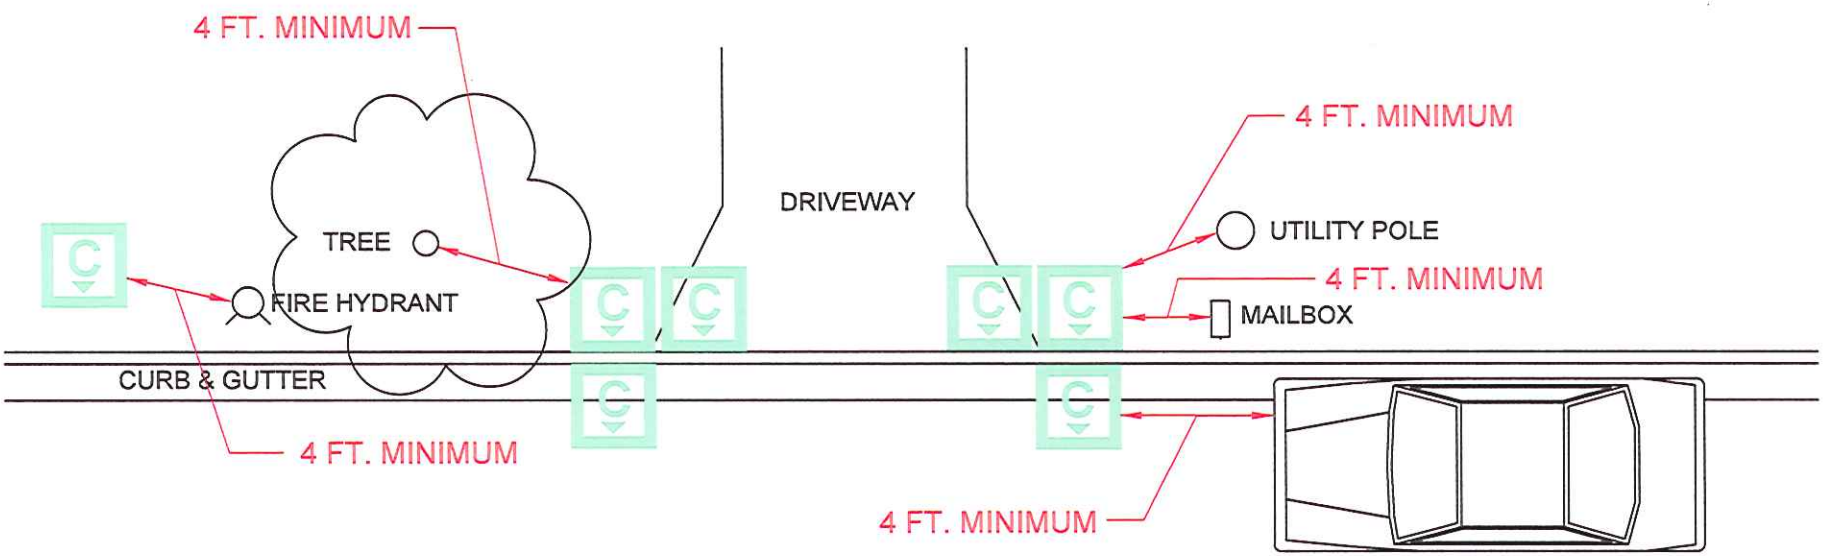

NO SIDEWALK WITH CURB

I:\SOS\VISIO\Cart_Locations.dwg

WHERE TO PLACE CARTS

-IN DRIVEWAY APRON
-ANYWHERE IN TERRACE
-ANYWHERE ALONG EDGE OF PAVEMENT
-MUST NOT BE PLACED ON TOP OF SNOW PILES
-4 FT. MINIMUM CLEARANCE FROM ALL OBSTACLES INCLUDING OTHER CARTS
-NO OBSTRUCTIONS BETWEEN CART AND CURB

NOTE: MAXIMUM TRUCK ARM REACH IS 8 FT.

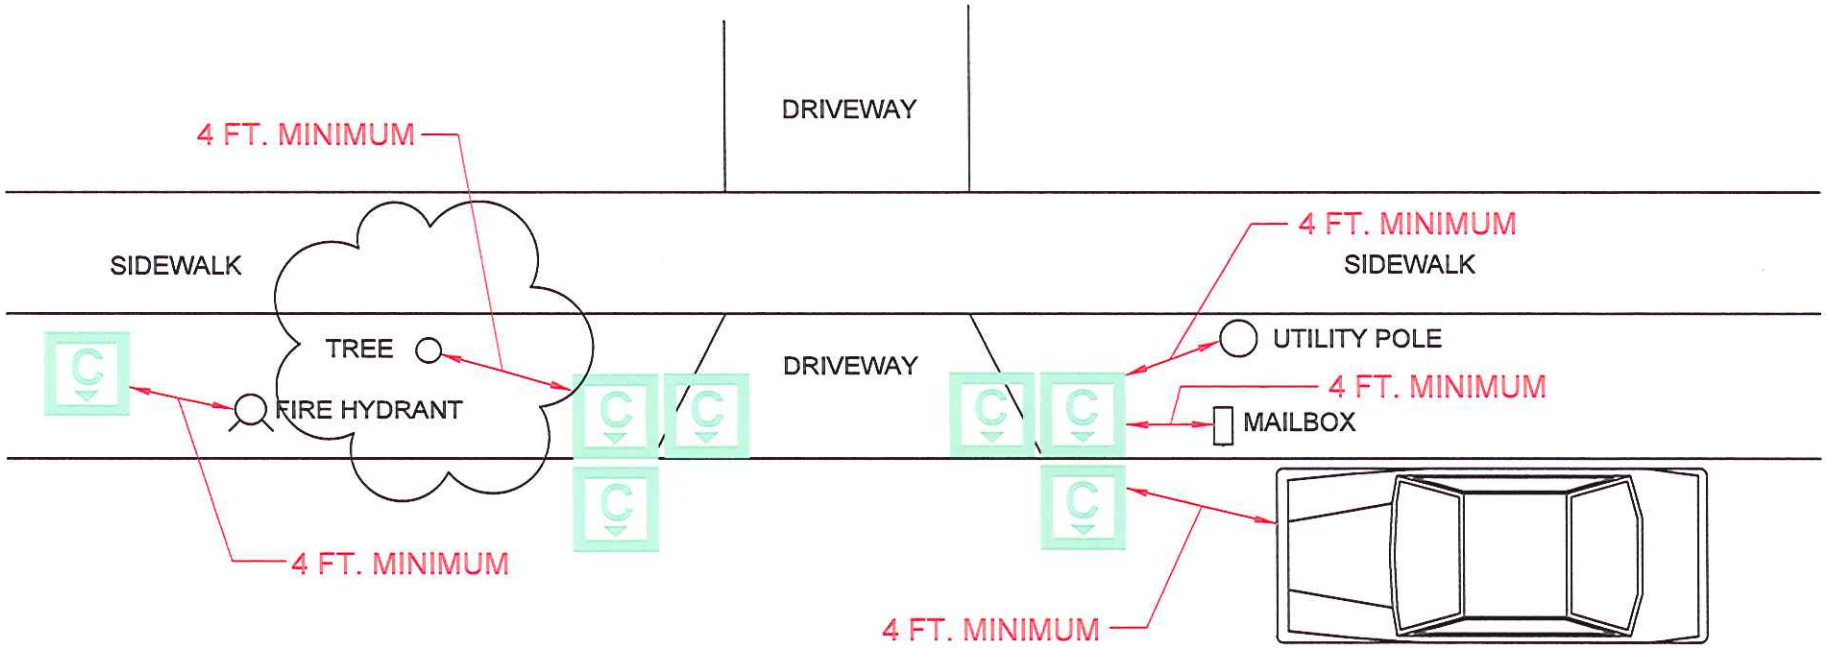

SIDEWALK WITH NO CURB

I:\BOS\ESC\Cart_Locations.dwg

WHERE TO PLACE CARTS

-IN DRIVEWAY APRON
-ANYWHERE ON SHOULDER ALONG EDGE OF PAVEMENT
-MUST NOT BE PLACED ON TOP OF SNOW PILES
-4 FT. MINIMUM CLEARANCE FROM ALL OBSTACLES INCLUDING OTHER CARTS
-NO OBSTRUCTIONS BETWEEN CART AND CURB

NOTE: MAXIMUM TRUCK ARM REACH IS 8 FT.

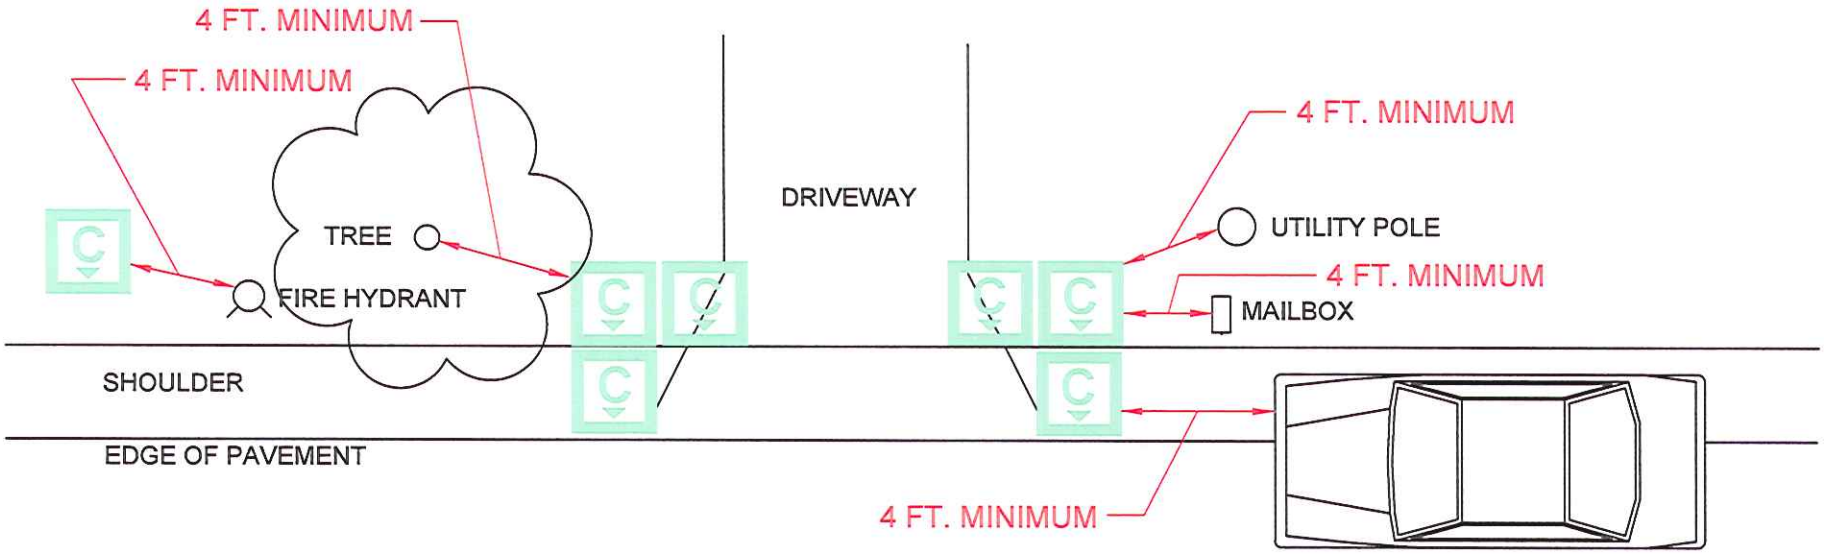

NO SIDEWALK AND NO CURB

I:\BOS\YSC\Cart_Locations.dwg